



EVALUATION OF THE BASE ISOLATION SYSTEM FOR CONTROLLING SEISMIC RESPONSE

¹Limesh Kumar Randive, ²Dr. Jyoti Yadav

¹M.Tech Scholar, ²Assistant Professor, Department of Civil Engineering, Sarvepalli Radhakrishnan University, Bhopal, M.P, India

ABSTRACT— Base isolation is one of the most powerful tools of earthquake engineering pertaining to the passive structural vibration control technologies. It limits the effects of the earthquake attack through a flexible base which decouples the structure from the ground motion, and the structural response accelerations are usually less than that of the ground acceleration. For this Three dimensional nonlinear time history analysis is performed on r/c building by the use of computer program SAP 2000 v12.0.0. The dynamic analysis of the structure has been carried out and the performance of the building with and without isolator is studied. The main objective here is to make seismic response control by providing Isolators and comparing between the fixed based and isolated base building. Rubber bearing and Friction pendulum bearing are used.

effective period and hence lower earthquake generated accelerations and inertia forces.

Many kinds of isolation systems have been developed to achieve this function, such as laminated elastomeric rubber bearings, lead-rubber bearings, yielding steel devices, friction devices (PTFE sliding bearings) and lead extrusion devices, etc. The main types of earthquake protective systems include passive, active and semi-active systems. In passive control systems the devices do not require additional energy source to operate and are activated by the earthquake input. Active control systems require additional power source, which has to remain operational during an earthquake and a controller to determine the actuator output. Hybrid control systems combine features of both passive and active control systems. Dynamic Analysis shall be performed to obtain the design seismic force, and its distribution to different levels along the height of the building and to various lateral loads resisting elements. Dynamic Analysis may be performed either by the Time History Method or by the Response Spectrum Method. Time History Method shall be used on as approximate ground motion and shall be performed by using accepted principles of Dynamics. Response Spectrum Method of analysis shall be performed by using design spectrum specified in 6.4.2 as per I.S. 1893(Part1):2002

I. INTRODUCTION

Base isolation (BI) is a mechanism that provides earthquake resistance to the new structure. Earthquakes are one of nature greatest hazards; throughout historic time they have caused significant loss of life and severe damage to property, especially to man-made structures. On the other hand, earthquakes provide architects and engineers with a number of important design criteria foreign to the normal design process. From well established procedures reviewed by many researchers, seismic isolation may be used to provide an effective solution for a wide range of seismic design problems. It controls structural response in which the building or structure is decoupled from the horizontal component of the earthquake ground motion by interposing a layer with low horizontal stiffness between the structure and its foundation. A base-isolation system reduces ductility demands on a building, and minimizes its deformations. These changes improve building performance.

According to the revised provisions of IS 1893 (Part 1): 2002 Code [3], the seismic zones of India become more vulnerable and reduced to four zones. So it is important to design the structures with seismic resistance. In seismic isolation, the fundamental aim is to reduce substantially the transmission of the earthquake forces and energy into the structure. This is achieved by mounting the structure on an isolation system with considerable horizontal flexibility so that during an earthquake, when the ground vibrates strongly under the structure, only moderate motions are induced within the structure itself. The primary function of an isolation device is to support the superstructure while providing a high degree of horizontal flexibility. This gives the overall structure a long

The basic concept of base isolation is to protect the structure from the damaging effects of an earthquake by improving dynamic response of structure. When base isolation is used, special bearings are installed between the bottom of the building and its foundation. The bearings are flexible in the horizontal direction and reduce the natural frequency of a building. The first dynamic mode of the isolated structure involves deformation only in the isolation system, and the structure above remains almost rigid. An isolated system does not absorb the vibrating energy, but rather deflects it through the dynamics of the system. It lengthens the natural period of vibration of the structure so that the responses are greatly reduced. In some cases a passive damper may also use to control excessive displacement. Figure 1 represents the shifting of period by the isolator and the resulting reduction in the acceleration response.

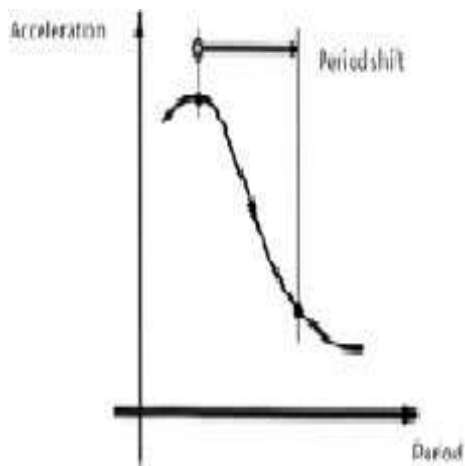


Fig. 1 Period shift induced by an isolator

The objective of this work is

- To illustrate the basic concept and behavior of the base isolated structures.
- To Analyze a building by providing rubber bearing and friction pendulum bearing.
- To study and compare total base shear force, maximum absolute acceleration, velocity, displacement with respect to the fixed base and isolated base structure.

II. METHODOLOGY

For comparing a fixed base and isolated base building a Seven-storied building is modeled in the SAP 2000 software. An open frame building model with 3 and 4 bays in each X and Y directions, the height of each storey as 3.2 m are modeled. Height of building is 22.4m, Width of building in X direction is 11m and Width of building in Y direction is 14 m. The material properties of the frame elements and the area element are defined and M25 concrete grade and Fe-415 is used. The rebar material properties are also given. The beams and columns of dimensions b1 300x300, b2 300x350, c1 230x350, c2 230x400, c3 230x450 mm are given as frame elements. The slab in the building is assigned as a shell element with a thickness of 120mm. Live load is taken as 3kn/m². Interior and Exterior wall thickness is taken as 150mm and 230mm. Soil type is taken as 1, Zone factor is V, Response reduction factor is taken as 5. And Importance factor is 1.. The support condition at the bottom is made as fixed and the fixed-base analysis is performed considering the combination of 1.5(DL+LL). All other data is referred from I.S.1893-2002. The period for the fixed base is identified. The SAP model of the building is shown in Figure 2.

Then the calculated rubber properties are given as link/ support properties in the software and the base-isolation model analysis is performed. The response of the structure with the rubber isolator and friction pendulum isolators are determined. The parameters selected to define the utilized Isolators in the SAP2000 program are as follows:

For Rubber Bearing

Nonlinear Link Type: Rubber, U1 Linear Effective Stiffness: 1500000 kN/m, U2 and U3 Linear Effective Stiffness: 800 kN/m, U2 and U3 Nonlinear Stiffness : 2500 kN/m, U2 and U3 Yield Strength : 80 kN, U2 and U3 Post Yield Stiffness Ratio: 0,1.

For Friction Pendulum Bearing

Nonlinear Link Type: Friction Isolator, U1 Linear Effective Stiffness: 15000000 kN/m, U1 Nonlinear Effective Stiffness: 15000000 kN/m, U2 and U3 Linear Effective Stiffness: 750 kN/m, U2 and U3 Nonlinear Stiffness: 15000 kN/m, U2 and U3 Friction Coefficient, Slow: 0,03, U2 and U3 Friction coefficient, Fast : 0,05, U2 and U3 Rate Parameter: 40, U2 and U3 Radius of Sliding Surface: 2,23. (Referred from. Torunbalci and G. Ozpalarlar 2 octo.12-17(2008)) After providing all the details the program is to be run to see the results.

III. RESULTS AND DISCUSSION

Analysis is done for both X and Y direction for fixed base and isolated base and is also carried for different storey heights of the building for the same building plan i.e. each floor. The isolator in each case varies in its total height and its single layer thickness depends on the vertical loads on the columns. The corresponding increase in time verses displacement by using time history analysis is represented by graph for fixed, rubber and friction bearing base fig.2a,2b,2c in X and 3a,3b,3c Y direction.

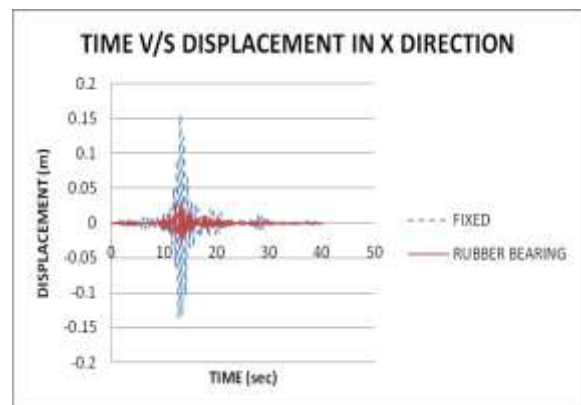


Fig 2a. For Fixed and Rubber bearing

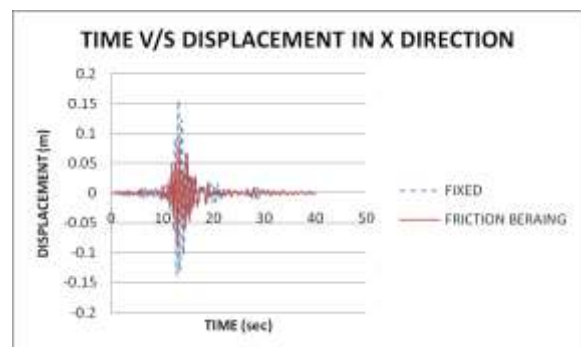


Fig 2b. For Fixed and Friction bearing

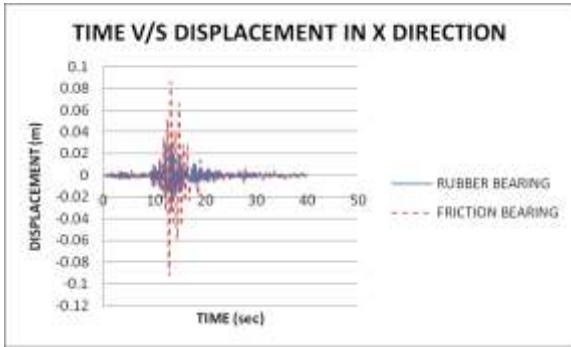


Fig 2c. For Friction and Rubber bearing

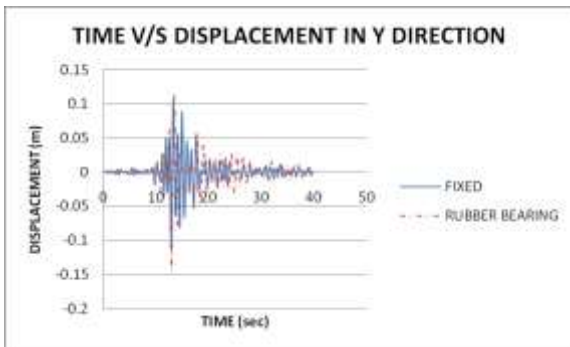


Fig 3a. For Fixed and Rubber bearing

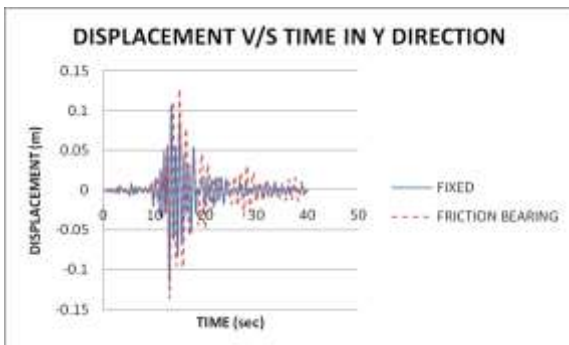


Fig 3 b. For Fixed and Friction bearing

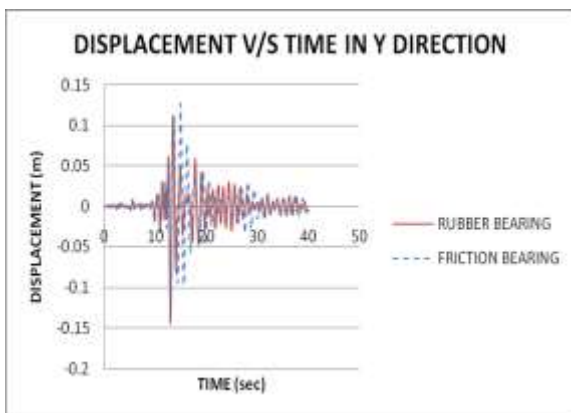


Fig 3c. For Friction and Rubber bearing

Base reaction in X and Y direction for Fixed base ,Rubber bearing and friction bearing isolators are represented byfig.4 and values are shown in table 1

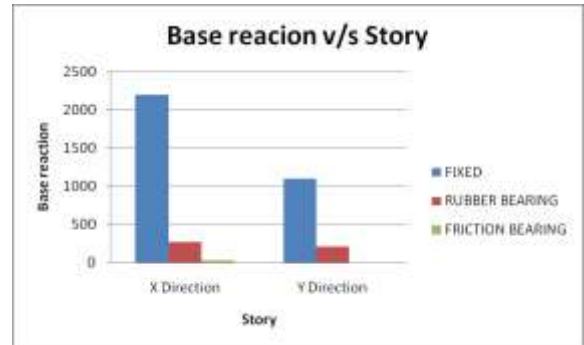


Fig 4. Base reaction v/s Story in X and Y direction

	FIXED	RB	FRB
X Direction	2200.176	268.558	33.616
Y Direction	1099.898	214.554	5.837

Table 1. BASE REACTION

Displacement with respect to story for fixed base ,rubber bearing, friction bearing are represented by fig 5 a for X direction and 5b for Y direction and values are shown in table 2



Fig 5a Displacement v/s Story in X direction

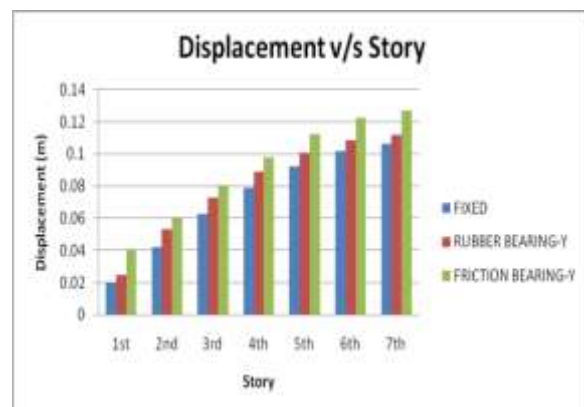


Fig 5b. Displacement v/s Story in Y direction

Story	JOINT DISPLACEMENT					
	Fixed U1	Fixed U2	Rb U1	Rb U2	Frb U1	Frb U2
	X	Y	X	Y	X	Y
	m	m	m	m	m	m
1st	0.019688	0.01943	0.00856	0.024781	0.065731	0.041051
2nd	0.049809	0.04222	0.01262	0.052928	0.078322	0.059677
3rd	0.080064	0.06249	0.01733	0.072985	0.085791	0.080492
4th	0.107544	0.07919	0.02223	0.089292	0.088718	0.09792
5th	0.130203	0.09239	0.02672	0.100713	0.088631	0.112487
6th	0.146413	0.10173	0.03019	0.108396	0.087336	0.122499
7th	0.155581	0.10667	0.03221	0.112042	0.086319	0.127335

Table 2 : Joint Displacement

Story	JOINT ACCELERATION					
	Fixed U1	Fixed U2	Rb U1	Rb U2	Frb U1	Frb U2
	X	Y	X	Y	X	Y
	m/sec^2	m/sec^2	m/sec^2	m/sec^2	m/sec^2	m/sec^2
1st	3.26868	2.47461	2.64427	2.58859	5.12463	2.01345
2nd	4.98295	2.64748	3.5071	2.55756	5.94795	1.98926
3rd	6.52387	3.87731	4.45245	2.57741	6.33089	2.3469
4th	8.07398	4.78505	5.39808	3.74789	6.34118	2.98273
5th	9.73806	5.13	6.24319	4.77362	6.25064	3.73975
6th	11.36987	5.13837	6.88498	5.40081	6.36227	4.40527
7th	12.37692	5.4219	7.2579	6.2219	6.43315	4.8021

Table 3 : Joint Acceleration

Acceleration with respect to story for fixed base ,rubber bearing, friction bearing are represented by fig 6 a for X direction and 6b for Y direction and values are shown in table 3

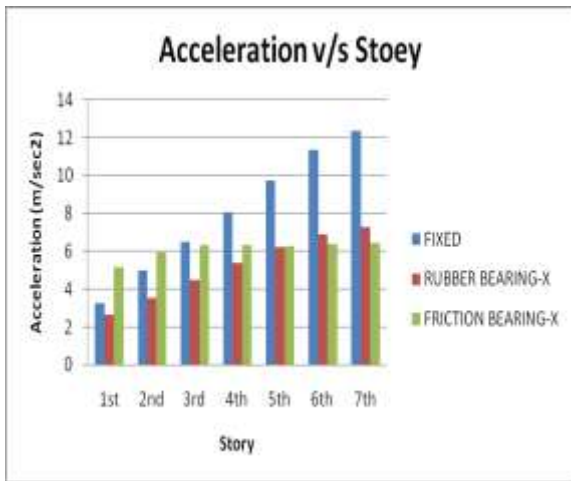


Fig 6a. Acceleration v/s Story in X direction

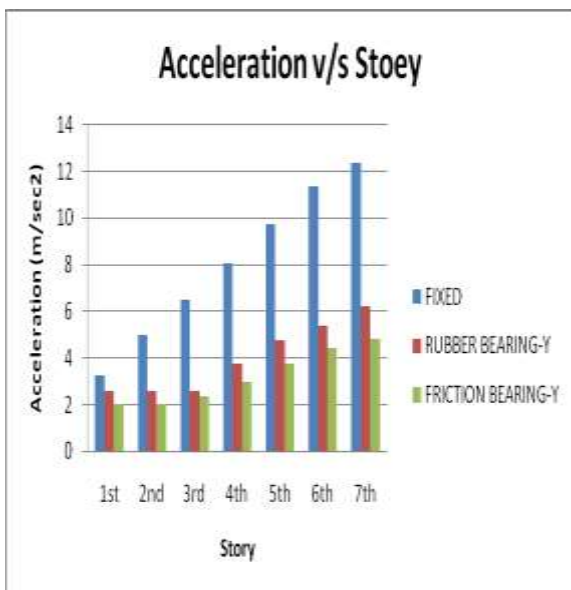


Fig 6b. Acceleration v/s Story in Y direction

IV. CONCLUSIONS

- Base isolation system and basic concept of base isolation are studied .
- Base Isolators controls structural response in which the building or structure is decoupled from the horizontal component of the earthquake ground motion. A base-isolation system reduces ductility demands on a building, and minimizes its deformations.
- From the result, By conducting the nonlinear time history analysis it was shown that base isolation increases the flexibility at the base of the structure which helps in energy dissipation due to the horizontal component of the earthquake and hence superstructure’s seismic demand drastically reduced as compared to the conventional fixed base structure.

REFERENCES

1. Y. Ribakov and I. Iskhakov ,” Experimental Methods for Selecting Base Isolation Parameters for Public Buildings .” *The Open Construction and Building Technology Journal*, 2008, 2, 1-6 (2008) .
2. Dinu Bratosin “Non linear effects in seismic base isolation.” *Proceedings of the Romanian academy, Series A, Volume 5, Number 3/2004, pp.(2004)*
3. James K Kelly “The implementation of base isolation in the United States” *earthquake engg tenth world conference 1994 Balkema, Rotterdam ISBN0954100605 (1994)*
4. Young-sang kim “Study on effective stiffness of base isolation system for reducing acceleration and displacement responses.” *Journal of the Korean nuclear society volume 31, number 6, pp.586-594, (Dec1999)*
5. A. B. M. Saiful Islam*, Mohammed Jameel and Mohd Zamin Jumaat “Seismic isolation in buildings to be a practical reality: Behavior of structure and installation technique.” *Journal of Engineering and Technology Research Vol. 3(4), pp. 99-117, (April 2011)*
6. Gordon P. Warn, and Keri L. Ryan “A Review of Seismic Isolation for Buildings: Historical Development and Research Needs” *Department of Civil and Environmental Engineering, Pennsylvania State University, 226B Sackett Building, University Park, PA 16802, USA (Aug2012)*
7. Hossein Monfared, Ayoub Shirvani, Sunny Nwaubani “An investigation into the seismic base isolation from practical perspective” *Internationals journal of civil and structural engineering Volume 3, No 3 (2013)*
- 8.



9. S.J.Patil, G.R.Reddy "State Of Art Review - Base Isolation Systems For Structures" *International Journal of Emerging Technology and Advanced Engineering* Volume 2, Issue 7, (July 2012)
10. S.Keerthana¹, K. Sathish Kumar², K. Balamonica³, D.S.Jagannathan⁴"Seismic Response Control Using Base Isolation Strategy "International Conference on Advances in Civil Engineering and Chemistry of Innovative Materials (ACECIM'14) Volume 4, Special Issue 4, June 2014
11. Chauhan Kalpesh M.1, Dr.B.J.Shah²" EXCEL SPREADSHEET FOR DESIGN OF LEAD RUBBER BEARING USES FOR SEISMIC
12. ISOLATION OF BRIDGES" Chauhan et al, *International Journal of Advanced Engineering Research and Studies , IJAERS/Vol. II/ Issue III/April-June, 2013/60-62*
13. Chandak N. R." Effect of Base Isolation on the Response of Reinforced Concrete Building" *Journal of Civil Engineering Research* 2013
14. T. Subramani¹, J. Jothi², M. Kavitha³" Earthquake Analysis of Structure by Base Isolation Technique in SAP" T. Subramani et al *Int. Journal of Engineering Research and Applications* ISSN : 2248-9622,
15. Vol. 4, Issue 6(Version 5), June 2014, pp.296-305
16. Won-Kee Hong *, Hee-Cheul Kim" Performance of a multi-story structure with a resilient-friction base isolation system" *Department of Architectural and Civil Engineering, Kyung Hee University, Kyungki-do 449-701, Korea (7 June 2004)*
17. N. Torunbalci¹ and G. Ozpalar²" Earthquake Response Analysis of Mid -Story Buildings isolated with various Seismic Isolation Techniques" *The 14th World Conference on Earthquake Engineering* October 12-17, 2008, Beijing, China
18. E. Blandford, E. Keldrauk, M. Laufer, M. Mieler, J. Wei, B. Stojadinovic, and P.F. Peterson" *Advanced Seismic Base Isolation Method For Modular Reactors" Departments of Civil and Environmental Engineering and Nuclear Engineering University of California Berkeley, California September 30, 2009*
19. By Lin Su,¹ Goodarz Ahmadi,² and Iradj G. Tadjbakhsh³" *Comparative Study of Base Isolation Systems"*